

# MDH series

Maximum working pressure up to 1 MPa (10 bar) - Flow rate up to 500 l/min



## Description

## Technical data

### Return filter

**Maximum working pressure up to 1 MPa (10 bar)**  
**Flow rate up to 500 l/min**

MDH, is a technically advanced filtration product line for efficient and compact, hydraulic reservoir management. Designed to ensure overall system cleanliness, the filters are either installed in a semi immersed or fully immersed position. This new design reduces the volume of the air coming into the tank space and dramatically reduces the velocity of the air through the filter which in turn allows the separation of the air from the fluid. This insures that the system is protected against the effects caused by air contamination such as incorrect system response, cavitation, foaming and fluid degradation. The filtration from inside to outside allows for a cleaner filter element replacement which insures that any contaminated fluid remains within the used filter element.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 500 l/min
- Multiple connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- Flat Seal to suit a variety of reservoir surfaces
- Oil dipstick, to easily check the level of the fluid into the reservoir (separate item)
- Anti-drain membrane, to reduce the volume of air coming to the tank
- Optimized flow path, to reduce the speed of the fluid through the filter
- Diffuser with optimized output, to promote the air separation and to reduce the risk of foaming and noise
- Optional filler plug, to fill cleaned fluid into the tank without an additional plug
- Visual, electrical and electronic clogging indicators and differential pressure clogging indicators

#### Common applications:

Heavy duty industrial equipment  
 Large mobile machines with limited space for the tank

### Filter housing materials

- Head and cover: Aluminium
- Anti-drain membrane: Polyamide
- Diffuser: AISI 430
- Valve: Polyamide / Steel

### Bypass valve

- Opening pressure 175 kPa (1.75 bar)  $\pm 10\%$
- Opening pressure 300 kPa (3 bar)  $\pm 10\%$

### $\Delta p$ element type

- Microfibre filter elements - series DH: 10 bar
- Fluid flow through the filter element from IN to OUT

### Seals

- Standard NBR series A
- Optional FPM series V

### Temperature

From -25 °C to +110 °C

### Note

MDH filters are provided for vertical mounting

## Weights [kg] and volumes [dm<sup>3</sup>]

Filter series	Weights [kg]			Volumes [dm <sup>3</sup> ]		
	Length	2	4	Length	2	4
<b>MDH 250</b>		3.80	4.55		4.65	6.90

Flow rates [l/min]

Filter series	Length	A03	A06	A10	A16	A25	M25 M60 M90	P10	P25
<b>MDH 250</b>	<b>2</b>	134	120	244	255	303	480	326	370
	<b>4</b>	217	256	338	419	487	465	437	694


### Maximum flow rate for a complete return filter with a pressure drop $\Delta p = 0.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.



Filter series	Style B
<b>MDH 250</b>	•



Hydraulic symbols

Pressure drop

Filter housings  $\Delta p$  pressure drop

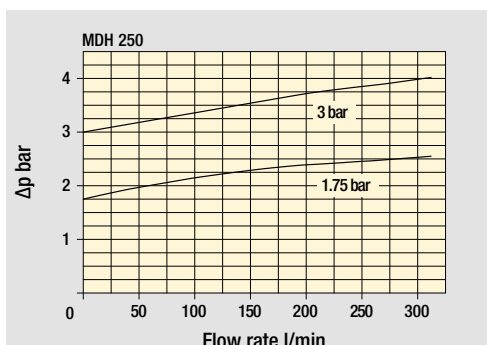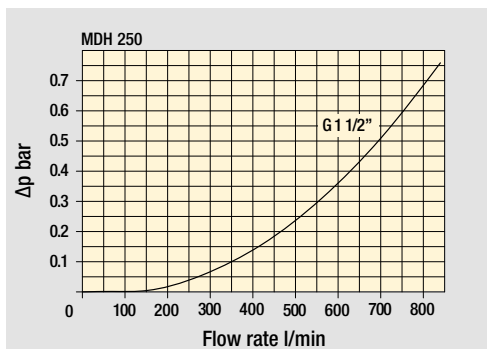

Bypass valve pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

# MDH250

## Designation & Ordering code

### COMPLETE FILTER

Configuration example: **MDH250** | **2** | **C** | **F** | **S** | **A** | **B** | **2** | **A10** | **P01**

**Series and size**  
MDH250

**Length**  
2 | 4

**Bypass valve**  
C 1.75 bar  
E 3 bar

**Diffuser**  
F With diffuser

**Air breather**  
S Without air breather

	Filtration rating		
	Axx	Mxx	Pxx
A NBR	•	•	•
V FPM	•	•	•
W NBR head anodized	•	•	-
Z FPM head anodized	•	•	-

**Connections**

	Front	Left	Right
A	G 1 1/2"	1 1/2" SAE 3000 psi/M + G 1 1/4"	1 1/4" SAE 3000 psi/M + G 1"
B	1 1/2" NPT	1 1/2" SAE 3000 psi/UNC + 1 1/4" NPT	1 1/4" SAE 3000 psi/UNC + 1" NPT
C	SAE 24 - 1 7/8" - 12 UN	1 1/2" SAE 3000 psi/UNC + SAE 20 - 1 5/8" - 12 UN	1 1/4" SAE 3000 psi/UNC + SAE 16 - 1 5/16" - 12 UN

**Connection indicator**  
1 Without connection  
2 With 2 plugged connections (pressure indicator + diff. pressure indicator)

**Filtration rating (filter media)**

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm

**Execution**  
P01 MP Filtri standard  
Pxx Customized

### FILTER ELEMENT

Configuration example: **DH250** | **2** | **A10** | **A** | **P01**

**Element series and size**  
DH250

**Element length**  
2 | 4

**Filtration rating (filter media)**

A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm

**Seals**  
A NBR  
V FPM

**Execution**  
P01 MP Filtri standard  
Pxx Customized

### CLOGGING INDICATORS

See page 716-717

**BVA** Axial pressure gauge  
**BVR** Radial pressure gauge  
**BVP** Visual pressure indicator with automatic reset  
**BVQ** Visual pressure indicator with manual reset

**BEA** Electrical pressure indicator  
**BEM** Electrical pressure indicator  
**BLA** Electrical / visual pressure indicator  
**DES** Electrical differential pressure indicator  
**DVS** Visual differential pressure indicator

### PLUGS

See page 743




**T4** Plug

# MDH250

## Dimensions


MDH250		
Filter length	H1 [mm]	H2 [mm]
2	300	380
4	485	565

Connections	T
A	G 1/8"
B-C	1/8" NPT

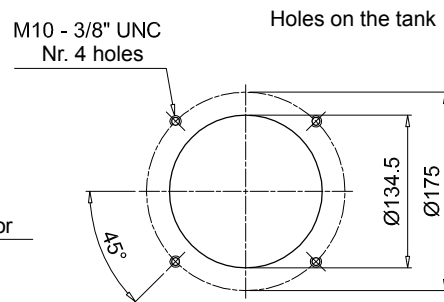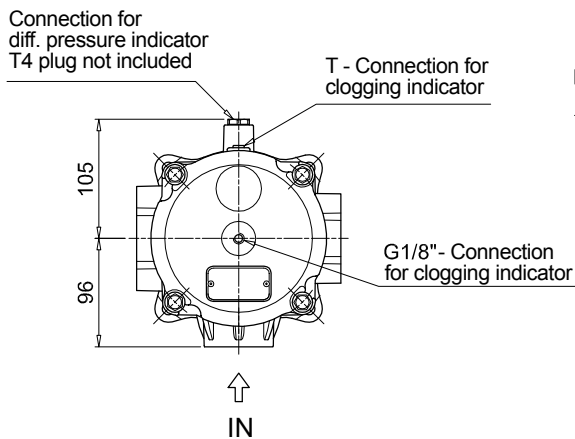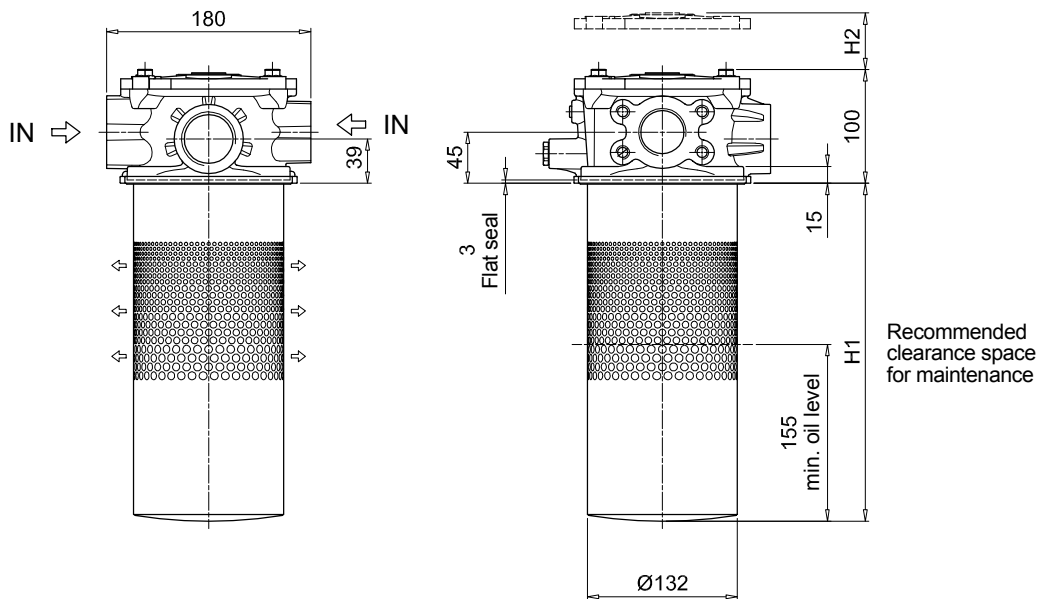

# MDH SPARE PARTS

Order number for spare parts

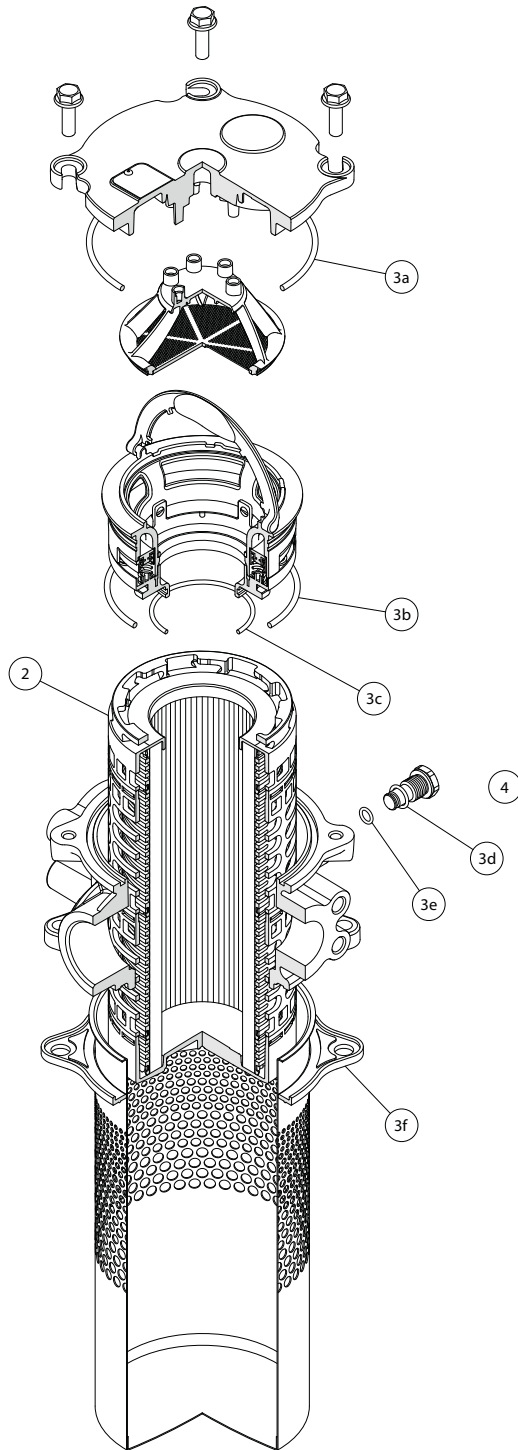

Item:	Q.ty: 1 pc. <b>2</b>	Q.ty: 1 pc. <b>3</b> (3a ÷ 3f)	Q.ty: 1 pc. <b>4</b>
Filter series	Filter element	Seal Kit code number NBR	Indicator connection plug NBR
<b>MDH 250</b>	See order table	02050850	T4A



## Designation & Ordering code

### BAROMETRIC (PRESSURE) INDICATORS

Series	Configuration example 1: BE A 15 H A 41 P01 EX									
<b>BE</b> Electrical pressure indicator	Configuration example 2: BL A 20 H A 71 P01									
<b>BL</b> Electrical/Visual pressure indicator	Configuration example 3: BV R 14 P01									
<b>BV</b> Visual pressure indicator	Configuration example 4: BV P 20 H P01									
Type	BE	BL	BV							
<b>A</b> Standard type	•	•	<b>A</b> Axial connection pressure gauge							
<b>M</b> With wired electrical connection	•	-	<b>R</b> Radial connection pressure gauge							
<b>T</b> With thermal switch	•	-	<b>P</b> Visual indicator with automatic reset							
			<b>Q</b> Visual indicator with manual reset							
Pressure setting	BEA-BEM	BET	BLA	BVA-BVR	BVP-BVQ					
<b>14</b> 1.4 bar	-	-	-	•	-					
<b>15</b> 1.5 bar	•	-	•	-	•					
<b>20</b> 2.0 bar	•	•	•	-	•					
<b>25</b> 2.5 bar	-	•	-	•	-					
Seals	BE	BLA	BVA-BVR	BVP-BVQ						
<b>H</b> HNBR	•	•	-	•						
Thermostat	BEA-BEM	BET	BLA							
<b>A</b> Without thermostat	•	-	•							
<b>F</b> With thermostat	-	•	-							
Electrical connections	BEA	BEM	BET	BL						
<b>10</b> Connection AMP Superseal series 1,5	-	-	•	-						
<b>30</b> Connection Deutsch DT-04-2-P	-	-	•	-						
<b>41</b> Connection via four-core cable	-	•	-	-						
<b>50</b> Connection EN 175301-803	•	-	-	-						
<b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc	-	-	-	•						
<b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc	-	-	-	•						
<b>53</b> Connection EN 175301-803, transparent base with lamps 230 Vac	-	-	-	•						
<b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc	-	-	-	•						
Option										
<b>P01</b> MP Filtri standard										
<b>Pxx</b> Customized										
Certifications	BEA	BEM-BET	BL	BV						
Without	•	•	•	•						
<b>EX</b> ATEX certification	•	-	-	-						
<b>UL</b> UL certification	•	-	-	-						



## DIFFERENTIAL PRESSURE INDICATORS

Series	Configuration example 1:	DE	M	20	H	F	50	P01	
<b>DE</b> Electrical differential pressure indicator	Configuration example 2:	DE	U	50	H	A	50	P01	UL
<b>DL</b> Electrical/Visual differential pressure indicator	Configuration example 3:	DL	E	20	V	A	71	P01	
<b>DT</b> Electrical differential pressure indicator	Configuration example 4:	DT	A	20	H	F	70	P01	
<b>DV</b> Visual differential pressure indicator	Configuration example 5:	DV	M	20	V			P01	

Type	DE	DL	DT
<b>A</b> Standard type	•	•	•
<b>M</b> With wired electrical connection	•	-	-
<b>U</b> Standard type 210 bar, UL certified	•	-	-
<b>E</b> For high power supply	-	•	-
<b>S</b> Compact version	•	-	-

DV
<b>A</b> With automatic reset
<b>M</b> With manual reset
<b>S</b> With automatic reset

Pressure setting	DEA	DEM	DEU	DES	DL	DT	DVA	DVM	DVS
<b>12</b> 1.2 bar	-	-	-	•	-	-	-	-	•
<b>20</b> 2.0 bar	•	•	•	-	•	•	•	•	-
<b>25</b> 2.5 bar	-	-	-	•	-	-	-	-	•

Seals	DEA	DEM	DEU	DES	DL	DT	DVA	DVM	DVS
<b>H</b> HNBR	•	•	-	•	•	•	•	•	•
<b>V</b> FPM	•	•	•	-	•	•	•	•	-

Thermostat	DEA	DEM	DEU	DES	DLA	DLE	DT
<b>A</b> Without thermostat	•	•	•	•	•	•	-
<b>F</b> With thermostat	-	•	-	-	-	•	•

Electrical connections	DEA	DEM	DEU	DES	DLA	DLE	DT
<b>10</b> Connection AMP Superseal series 1.5	-	•	-	•	-	-	-
<b>20</b> Connection AMP Timer Junior	-	•	-	-	-	-	-
<b>30</b> Connection Deutsch DT-04-2-P	-	•	-	•	-	-	-
<b>35</b> Connection Deutsch DT-04-3-P	-	•	-	-	-	-	-
<b>50</b> Connection EN 175301-803	•	-	•	-	-	•	-
<b>51</b> Connection EN 175301-803, transparent base with lamps 24 Vdc	-	-	-	-	•	-	-
<b>52</b> Connection EN 175301-803, transparent base with lamps 110 Vdc	-	-	-	-	•	-	-
<b>70</b> Connection IEC 61076-2-101 D (M12)	-	-	-	-	-	-	•
<b>71</b> Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc	-	-	-	-	•	-	-
<b>80</b> Connection Stud #10-32 UNF	-	-	-	•	-	-	-

Option
<b>P01</b> MP Filtri standard
<b>Pxx</b> Customized

Certifications	DEU	OTHERS
Without	-	•
<b>UL</b> UL certification	•	-

## PLUGS

Series	Configuration example	T2	H
<b>T2</b> Plug			
<b>T4</b> Plug			

Seals	T2	T4
<b>A</b> NBR	-	•
<b>H</b> HNBR	•	-
<b>V</b> FPM	•	-